

PSD011B 1 STAGE HEAT / 1 STAGE COOL

- **Battery Powered Only**
- **Large Illuminated Digital Display**
- **Attractive Slim Design**
- **Soft Touch Buttons**
- **Default Set Temps: 65F Heat / 78F Cool**
- **Fahrenheit/Celsius Switchable**
- **Adjustable Temperature Stops**
- **5 Minute Compressor Protection**
- **Easy Installation**
- **Optional Wall Plate Available**


Compatible With:

- Most 24V Heating and A / C Systems
- 1 Stage Heat / 1 Stage Cool: Gas, Oil, Electric, or Single Stage Heat Pump Systems
- 2 Wire Heat Only Hydronic Systems (Hot Water Baseboard & Radiator)
- Millivolt Systems (Wall Heaters / Furnaces & Gas Fireplaces)

Not Compatible With:

- Multi-stage Heat Pumps
- 3 Wire Hydronic Systems
- Line Voltage Systems (120 / 240 VAC)

Terminals: RH, RC, W1, Y1, G, O/B

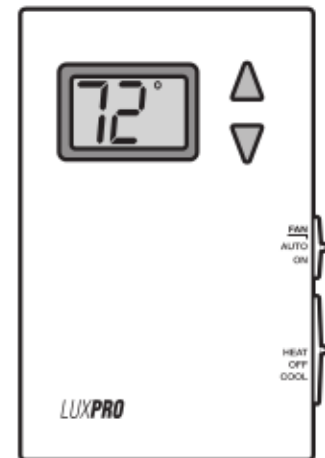

GENERAL DESCRIPTION:

3.25" (83mm) wide x 5.05" (128mm) tall x 1.10" (28mm) deep
Wall plate: 4.50" (114 mm) wide x 5.45" (138 mm) tall

Description: Digital thermostat with a large easy-to-read display with backlight. Temperature control set from factory at a fixed value of +/- 0.5° F/C. **Available power options are: [W] System Powered Only version, or [B] Battery Powered Only version.**

SPECIFICATIONS:

Electrical Ratings: 1½ AMPS at each terminal, 3 AMPS total 24 VAC.

PSD011W: System Powered Only

PSD011B: Battery Powered Only (2 "AA" Batteries).

WARNING: Use Energizer® or DURACELL® Alkaline Batteries Only.

Energizer® is a registered trademark of Eveready Battery Company, Inc. - DURACELL® is a registered trademark of The Gillette Company, Inc.

Temperature Control Range: 45°F to 90°F (7° to 32°C). Accuracy: ±1°F over a range of 45°F to 90°F.

Environmental Limits:

Moisture and Dust: meets IP20.

Operating Humidity: 20% to 90% non-condensing.

Operating Temperature: +14°F to +122°F (-10°C to +50°C).

Storage Temperature: -4°F to +140°F (-20°C to +60°C).

Electrical Immunity: meets relevant CE specifications.